

Like no other air chuck on the market, the Lock N Flate's six steel jaws lock onto any Schrader valve to create a secure, hands-free connection. The straight design provides a direct, in-line connection for easy use on accessible valve stems. The heavy-duty construction is built to last and stand up to everyday use in even the busiest tire shops, service bays, and garages.

REVOLUTIONARY DESIGN:

Six steel jaws lock onto any Schrader valve to create a secure, hands-free connection.

1/4" NPT THREAD SIZE:

Compatible with most standard air hoses

HARDENED STEEL COLLET:

Fits all standard Schrader valves [VG8/8V1 valve threads]

RATED TO 150 PSI:

Suitable for garage and industrial airline systems, auto and manual tire inflators, portable pressure gauges, and constant pressure systems
Built to last and stand up to everyday use in even the busiest tire shops, service bays, and garages.

HEAVY-DUTY CONSTRUCTION:

DURABLE, SPRING-LOADED TPU SEAL:

Inflate tires with or without the valve core in place

OPEN FLOW:

Air passes through freely on or off the valve stem. For use with inflator gauges and automatic systems

CLOSED FLOW:

Must engage the tire valve for air to flow. For use directly from a compressor or air hose


Straight Air Chucks

STRAIGHT DESIGN: Provides a direct, in-line connection for easy access on standard valve stems.

Open Air Chuck
Part# LNL65001

Closed Air Chuck
Part# LNL65002

\$40³⁹
EACH

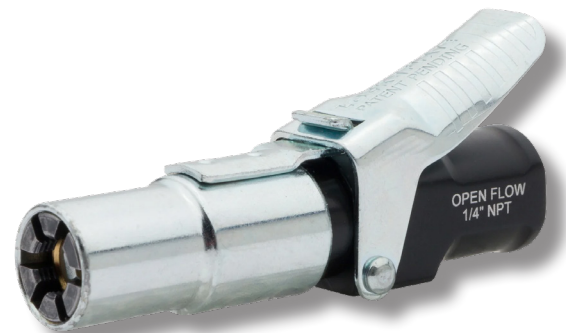

90° Air Chucks

90-DEGREE DESIGN: Ideal for tight spaces and hard-to-reach valve stems

90° Open Air Chuck
Part# LNL65011

90° Closed Air Chuck
Part# LNL65012

\$40³⁹
EACH



Grease Coupler

LEAK FREE, HIGH PRESSURE SEAL
Patented design reduces leakage.

FOUR HARDENED SPRING STEEL JAWS


- Resilient under high pressure.
- Fits all DIN and SAE specification Zerk grease nipples.

SLIDING SLEEVE
Locks the coupler onto the Zerk. When you pump grease ... it stays on!

SPRING LOADED THUMB LEVER

- Simply push the trigger to lock the coupler onto the Zerk or to release the coupler when done.
- Easy release, regardless of pressure build up in the line. **NO MORE** stuck couplers.
- No need to hold while greasing. Lock on and free up both hands to operate your grease gun.
- Textured thumb lever for a non-slip grip.

1/8" NPT FEMALE THREAD
Standard size, fits most grease guns.

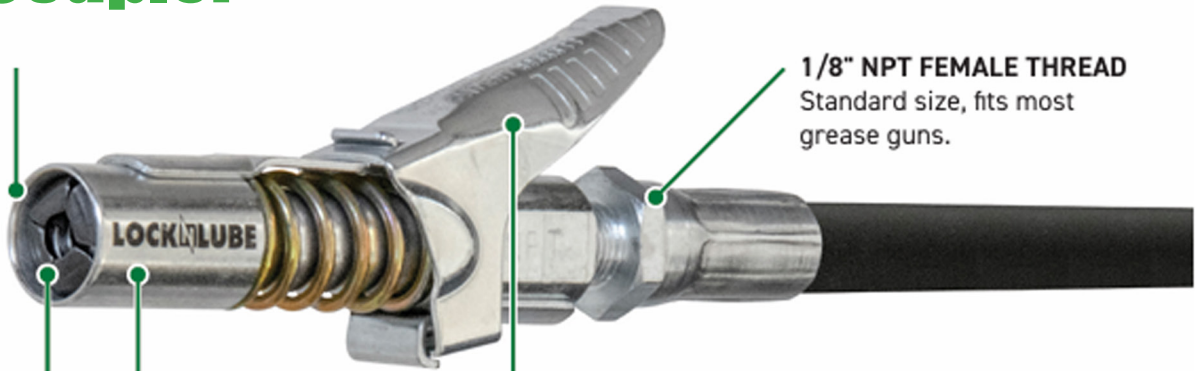

- Locks on, stays on, won't leak. Rated to 10,000 PSI – Patented locking jaws grip the Zerk to create a secure, leak-free seal that will not pop off under pressure, enabling true hands-free greasing and cleaner lubrication
- Easy release, even under pressure. No broken Zerks – Thumb-activated sleeve locks and unlocks quickly with one hand, disconnecting safely without pulling, fighting, or damaging grease fittings
- Universal 1/8" NPT compatibility – Fits all standard grease guns including battery, pneumatic, and manual models, making it an easy, reliable upgrade for any grease gun
- Grease goes in, not on, the machine – Internal seal directs grease into the bearing instead of leaking around the fitting, reducing mess, waste, and cleanup while improving lubrication
- Works on all Zerk fittings, SAE and metric – Designed for universal fit across standard grease fittings for dependable performance on automotive, agricultural, and industrial equipment
- Rebuildable design. Lowest lifetime cost – The only fully rebuildable grease coupler, available with or without a rebuild kit, extending service life and reducing replacement cost in demanding use
- Patented and Proven – Featured on TruckU on the MotorTrend Channel, trusted by professionals for reliable, leak-free greasing. U.S. Patent #8,955,544

Part# GC81068

\$31⁰²

To take advantage of these savings contact your local Tech representative or call **(913) 888-5466** Also visit **www.techtiresupply.com** 